Quality Assurance
Site Survey Report for Closet World (Quemetco)

Last updated May, 2014

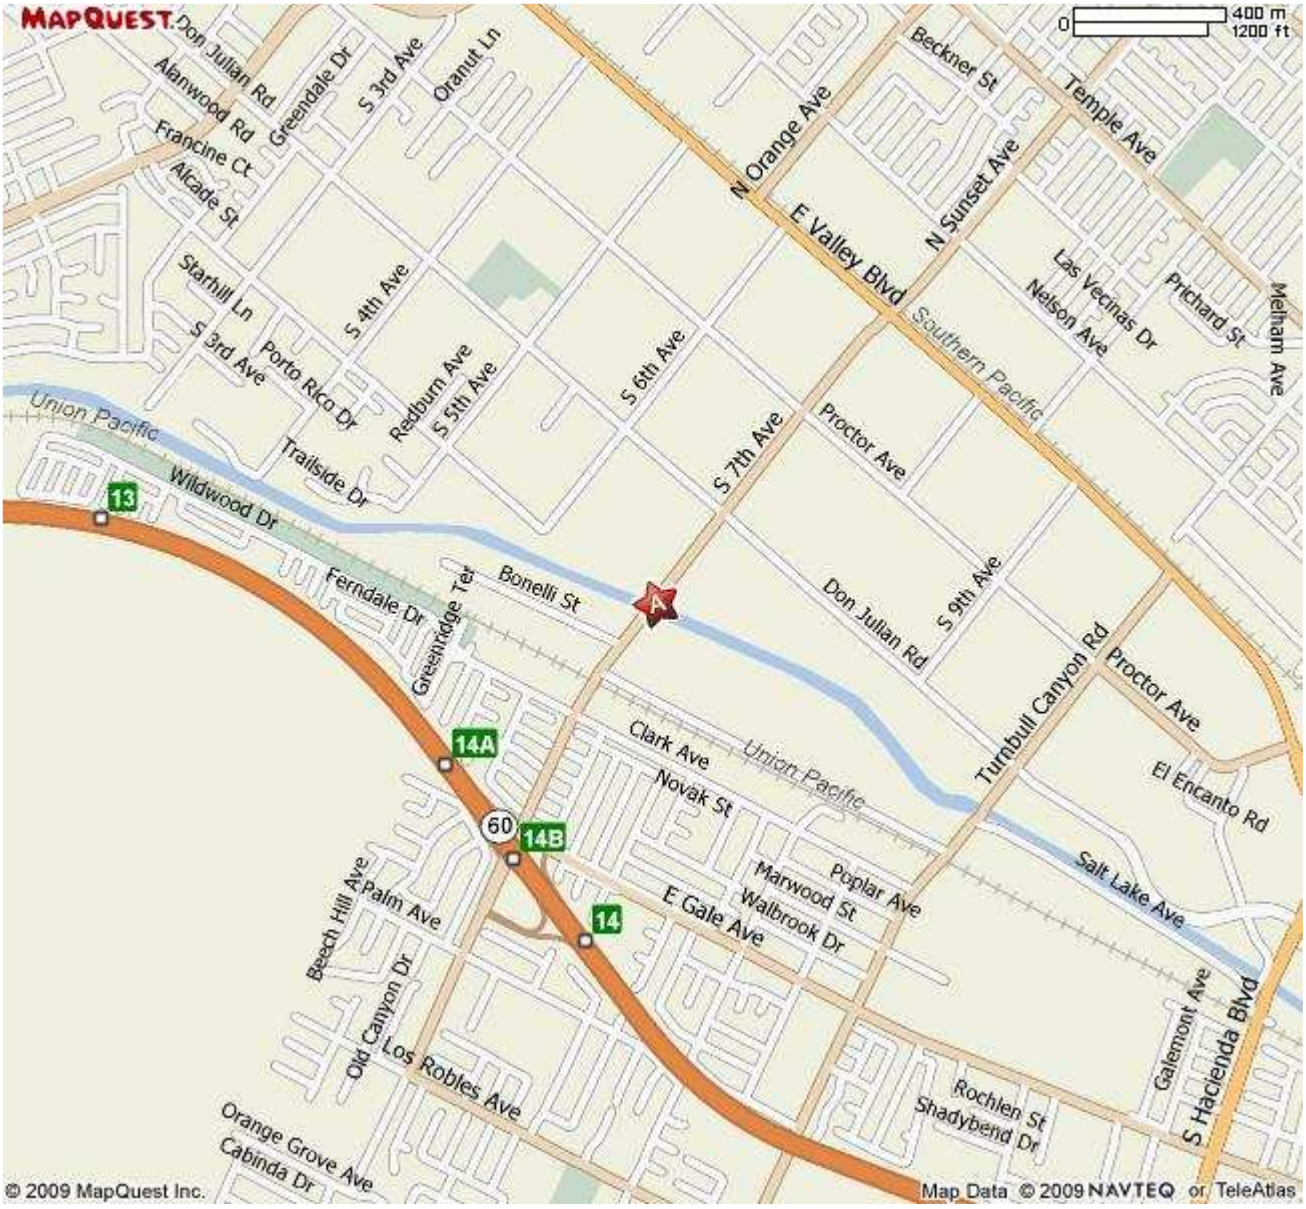

AQS ID	ARB Number	Site Start Date	Reporting Agency and Agency Code
060371404	70043	10/03/2008	South Coast AQMD (061)

Site Address	County	Air Basin	Latitude	Longitude	Elevation
500 S. 7th Ave. City of Industry, CA 91746	Los Angeles	South Coast	34° 01' 34"N	117° 58' 54"W	89 m

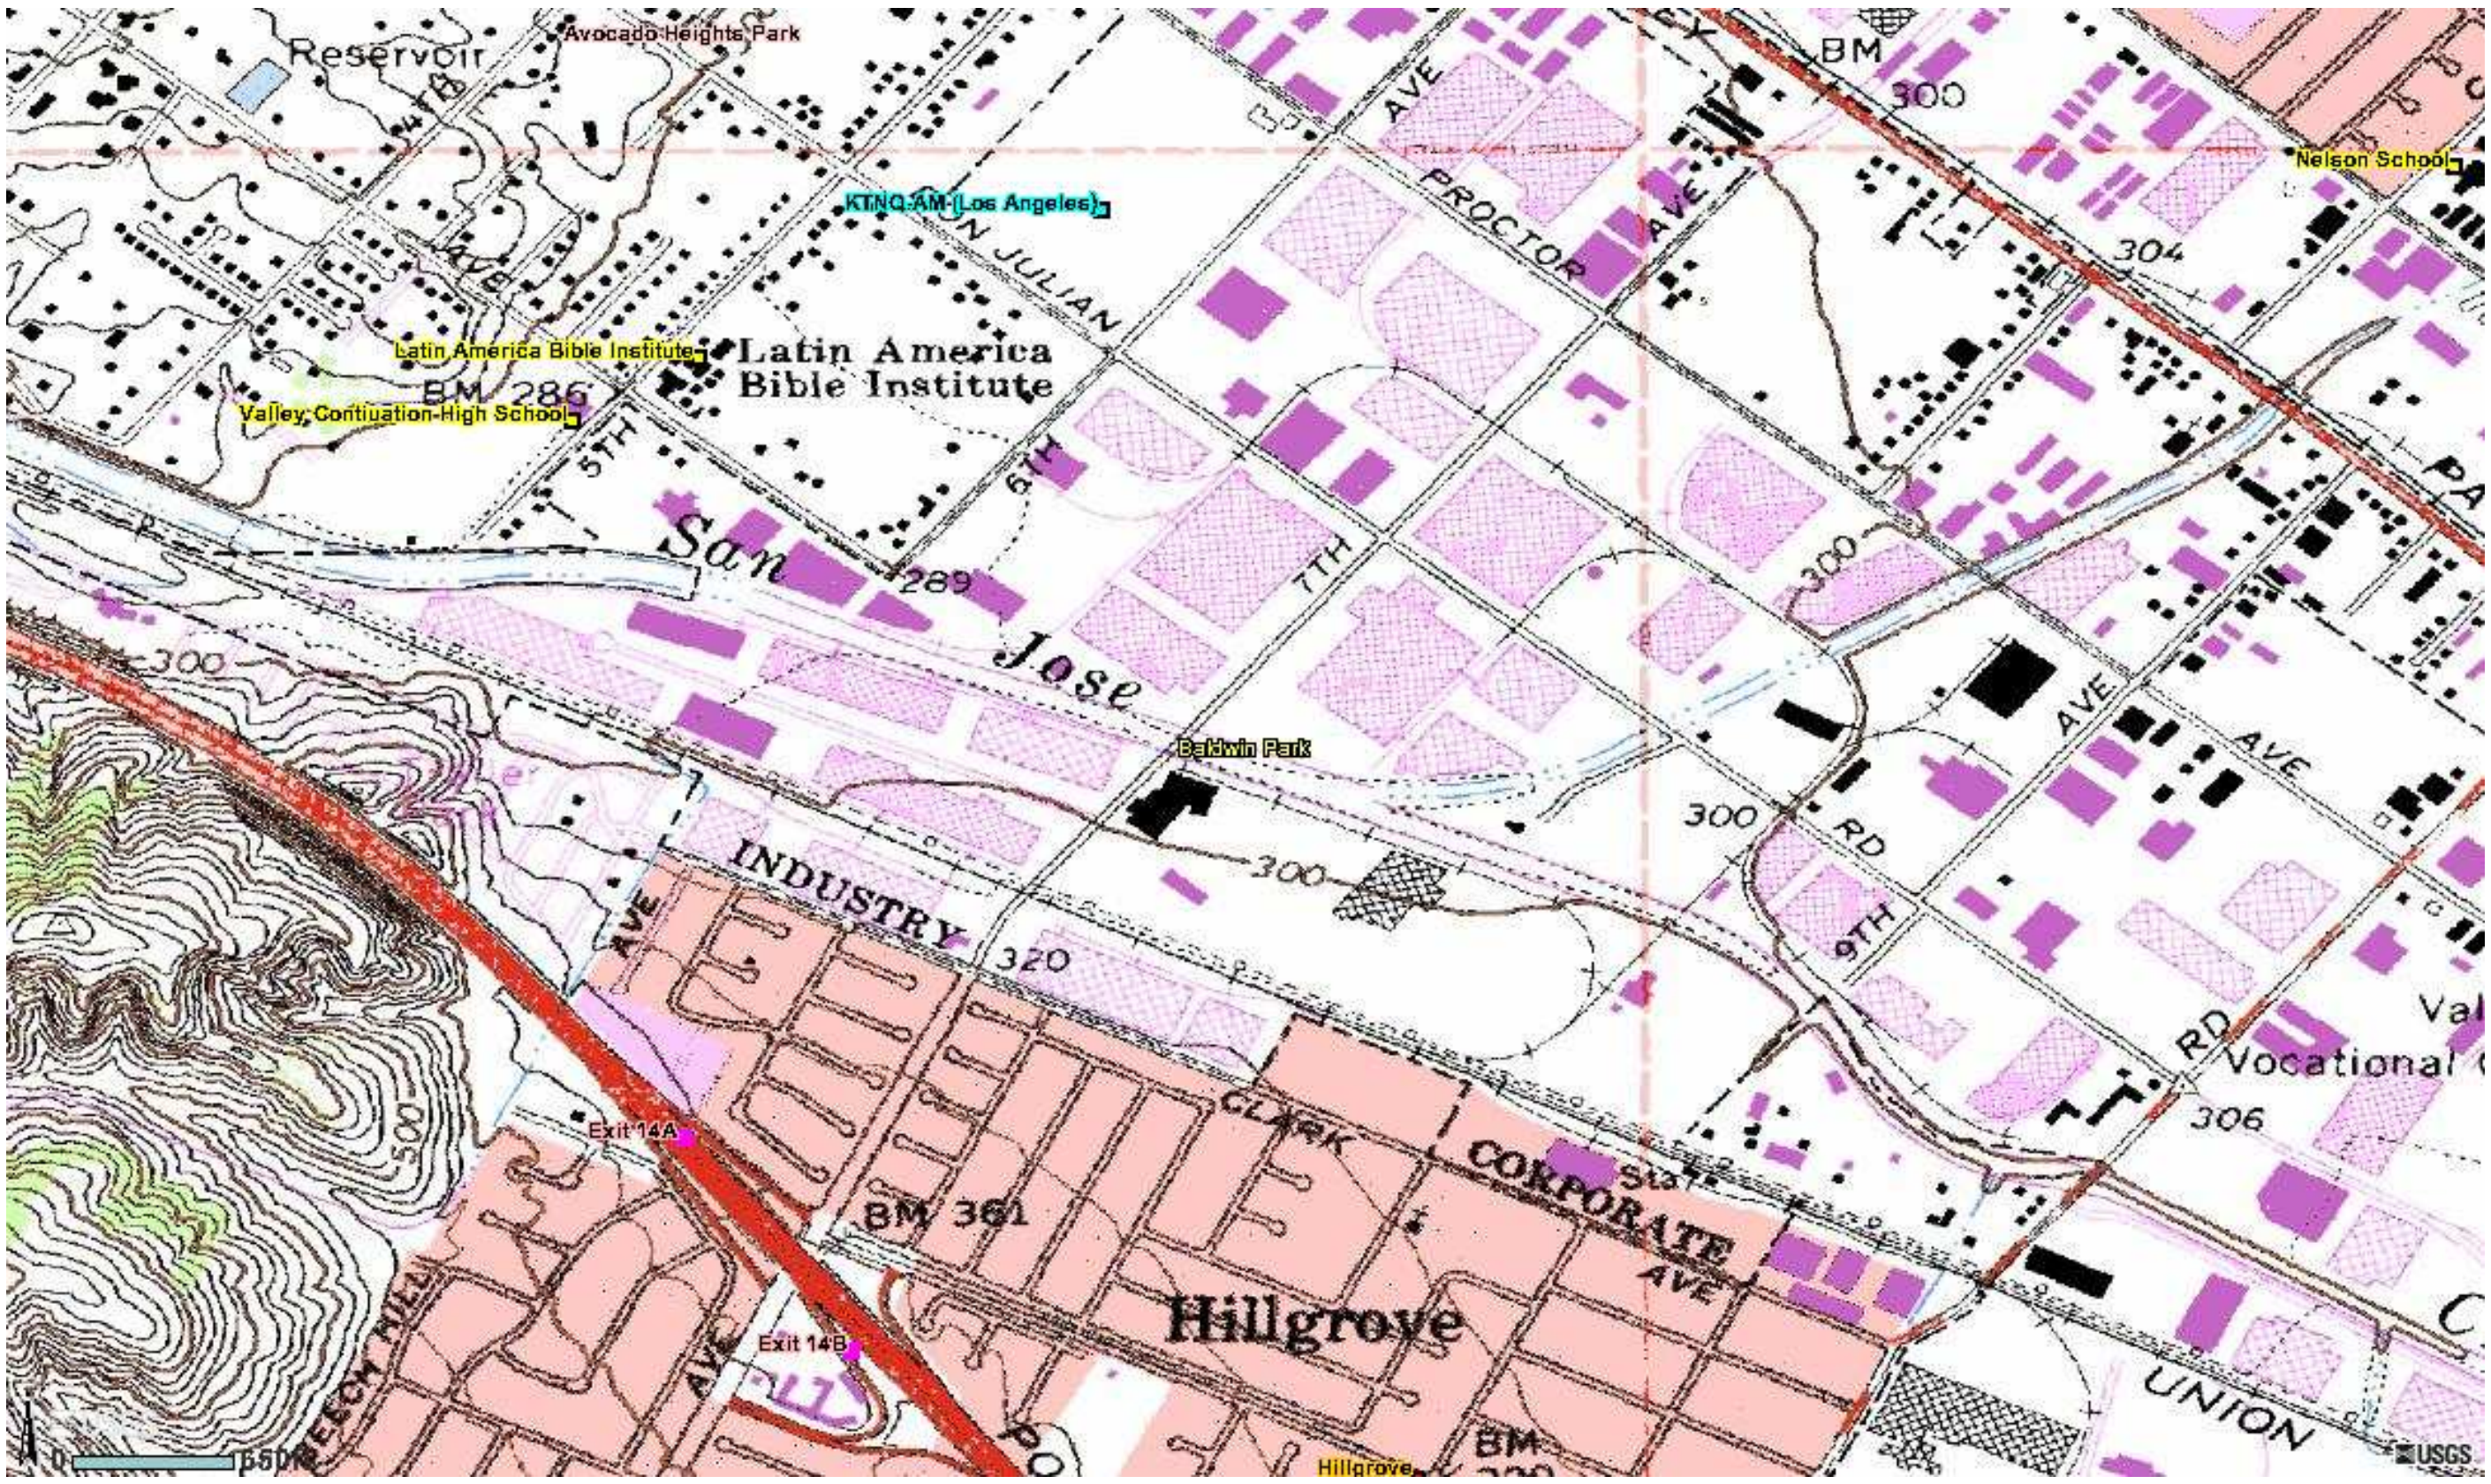
Reservoir
Avocado Heights Park
KTNQ-AM (Los Angeles)
Latin America Bible Institute
Latin America
Bible Institute
Valley Contiuation High School
BM 286
Nelson School
PROCTOR
AVE
BM
300
304
N JULIAN
5TH
6TH
7TH
9TH
San
Jose
289
300
Baldwin Park
INDUSTRY
320
RD
AVE
Vocational
306
Exit 14A
BM 361
CLARK
CORPORATE
AVE
Hillgrove
Exit 14B
UNION
500
USGS

Detailed Site Information

Local site name	Closet World (Quemetco)
AQS ID	060371404
GPS coordinates (decimal degrees)	Latitude: 34° 01' 34" Longitude: 117° 58' 54"
Street Address	720 S 7th Ave. City of Industry, CA 91746
County	Los Angeles
Distance to roadways (meters)	30
Traffic count (AADT, year)	20,000 / 2012
Groundcover (e.g. asphalt, dirt, sand)	Asphalt
Representative statistical area name (i.e. MSA, CBSA, other)	31080-Los Angeles-Long Beach-Anaheim, MSA

Pollutant, POC	Lead, 1			
Parameter code	14129			
Basic monitoring objective(s)	NAAQS			
Site type(s)	Source Oriented			
Monitor (type)	SLAMS			
Instrument manufacturer and model	GMW 1200 TSP			
Method code	110			
FRM/FEM/ARM/ other	FRM			
Collecting Agency	SCAQMD			
Analytical Lab (i.e.weigh lab, toxics lab, other)	SCAQMD			
Reporting Agency	SCAQMD			
Spatial scale (e.g. micro, neighborhood)	Micro			
Monitoring start date (MM/DD/YYYY)	10/03/2008			
Current sampling frequency (e.g.1:3, continuous)	1:6			
Calculated sampling frequency (e.g. 1:3/1:1)	1:6			
Sampling season (MM/DD-MM/DD)	01/01-12/31			
Probe height (meters)	2.6			
Distance from supporting structure (meters)	1			
Distance from obstructions on roof (meters)	N/A			
Distance from obstructions not on roof (meters)	N/A			

Distance from trees (meters)	N/A			
Distance to furnace or incinerator flue (meters)	N/A			
Distance between collocated monitors (meters)	N/A			
Unrestricted airflow (degrees)	360°			
Probe material for reactive gases (e.g. Pyrex, stainless steel, Teflon)	N/A			
Residence time for reactive gases (seconds)	N/A			
Will there be changes within the next 18 months? (Y/N)	No			
Is it suitable for comparison against the annual PM2.5? (Y/N)	N/A			
Frequency of flow rate verification for manual PM samplers	Monthly			
Frequency of flow rate verification for automated PM analyzers	N/A			
Frequency of one-point QC check for gaseous instruments	N/A			
Last Annual Performance Evaluation for gaseous parameters (MM/DD/YYYY)	N/A			
Last two semi-annual flow rate audits for PM monitors (MM/DD/YYYY, MM/DD/YYYY)	11/20/2013, 05/03/2013, 03/19/2013			

Quemetco – Closet World
Site Photos

Looking North from the probe

Looking East from the probe.

Looking South toward the probe.

Looking West from the probe